




Optional Plunge Saw Accessories

- 1 1 x guide rail 1400 mm
- 2 2 x clamping devices
- 3 1 x guide track connector
- 4 1 x tilt safety device
- 5 1 x limit stop

Specifications Plunge Saw	
Dimensions l / w / h	340 / 260 / 235 mm
Blade diameter	Ø 160 mm (6-1/4)
Arbor Diameter	20 mm (13/16)
Blade Speed	5500 rpm
Max Cut 90° w / o Guide Rail	55 mm
Max Cut 45° w / o Guide Rail	40 mm
Bevel capacity	0 – 45°
Close to Wall Cut	15,5 mm
Dust collection diameter	38 mm
Weight	4.8 kg
Motor	230 V
Input	1200 W
Order No.	490 1802 000
Specifications Guide Rail	
Guide rail length	1400 mm
Order No.	490 1802 701

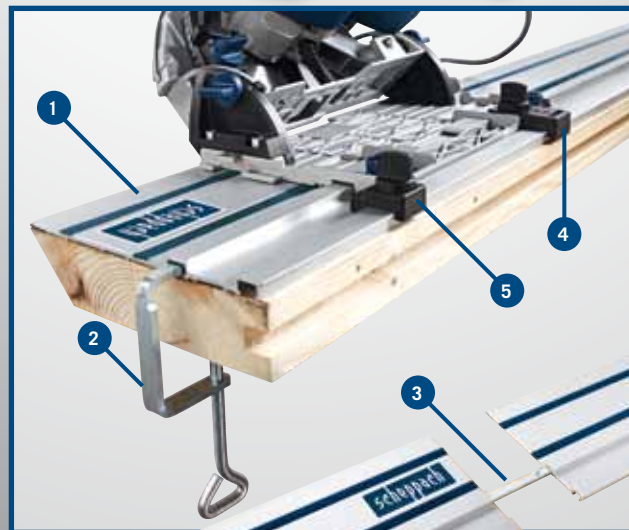

scheppach Fabrikation von Holzbearbeitungsmaschinen GmbH

D-89335 Ichenhausen | Fon 00 49/82 23/40 02-0 | Fax 00 49/82 23/40 02-20

info@scheppach.com | www.scheppach.com

Service: Fon 00 49/82 23/40 02-99 | Fax 00 49/82 23/40 02-58

scheppach


www.scheppach.com

Edition 06/2012. Responsibility cannot be accepted for translation or printing errors. We reserve the right to change the specification without prior notification.

scheppach
cs 55



**PROFESSIONAL
RESULTS**
EVEN BY AMATEURS



The combination of a Scheppach cs 55 – plunge saw, and a guide rail will create a system that generates precision cuts anywhere that should never be attempted with a traditional circular saw



The scheppach plunge saw cs 55 – 3 „saws“ in one


- ✓ Use as a plunge saw.
- ✓ Use instead of a circular sawbench for precise parallel panel sizing.
- ✓ Use as a normal portable circular hand saw.

	160 mm
	1.2 kW
	55 mm

- Powerful 1200 Watt Motor
- Parallel plunge allows the user to maintain a smooth and constant hand position while cutting
- A 24 tooth blade gives a fine and accurate finish with very little breakout in laminates
- The enclosed guard gives a 90 % dust extraction capability
- 55 mm depth of cut allows the trimming and sizing of most common door sizes
- Suitable for boards and solid wood
- Maximum precision, even when cutting free hand
- 15.5 mm – close to wall cut
- With the cs 55, anyone can get great results in the shop or on the jobsite



55 mm maximum stepless cutting depth.

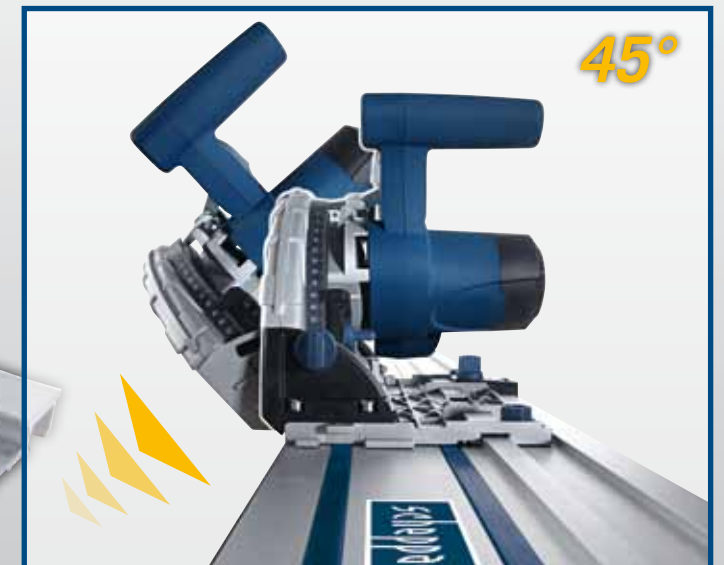

Mitre cuts with stepless angle adjustment. 0° to 45° angle adjustment



Perfect for kitchen worktops. Only possible with a plunge saw system. Even an amateur can achieve exact parallel splinter free cuts using the cs 55 with optional guide track system.



Achieve cuts usually performed on a panel sizing table saw: perfect parallel and trim cuts.



cs 55 ideal whatever the material:
• solid natural timbers • chipboard • plywood • even MDF and double coated boards ...



Ideal for edging up to 15.5 mm from the wall. Another example of cs 55 diverse operations.